

PRODUCT OVERVIEW

eFlow-Single Blade Motorized Air Control Damper is a low leakage round control damper that is easily installed in round ductwork. It is designed for use in low to medium pressure commercial HVAC systems. The damper opens and closes via a blade controlled by a Belimo actuator. This damper is available in 4", 5", 6", 8", 10", 12" diameter.



*shown: custom length frame

eFlow-Motorized Damper FACTS

- Easy in-line installation (no mounting hardware or additional support required)
- Diameters offered: 4", 5", 6", 8", 10", 12"
- Operating Pressure Range: up to 4" w.c.
- Suitable for both supply and exhaust applications
- Maximum operating temperature: 180° F
- Operated by Belimo actuator: 24V or 120V
- 6" long frame
- 22/20 Ga. galvanized steel
- Stainless Steel (optional)
- Commercial grade
- Single blade
- Low leakage closed cell neoprene
- Non-metallic celcon bearings
- Bronze bearings (optional)
- Maintenance free and corrosion-proof under normal conditions
- Made in USA
- Warranty guaranteed for (5) years*




**MADE IN
USA**

**5 year
warranty**

INSTALLATION / WIRING INSTRUCTIONS

- This damper offers easy in-line installation. There is no mounting hardware or additional support required.
- This damper has unidirectional application and must be installed in accordance with the airflow direction arrow as shown on the device.
- All electrical wiring should be performed according to Belimo electrical installation instructions.

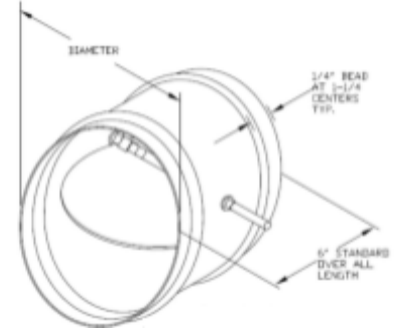

https://www.belimo.com/mam/americas/technical_documents/data_sheets/air/LMB24-3-T.pdf

MAINTENANCE

No maintenance when used in normal conditions.

WARRANTY

5 Year Warranty from date of shipment, against all manufacturing defects, provided the material has been installed and operated per manufacturer's instructions and under normal conditions. Warranty is limited to the repair or replacement of the material upon its return freight paid to our warehouse. The warranty is limited to the original end user.

eFlow-Motorized Damper		
Diameter	Length	Weight
<input type="checkbox"/> 4"	6"	1.5lb
<input type="checkbox"/> 5"	6"	1.7lb
<input type="checkbox"/> 6"	6"	2.0lb
<input type="checkbox"/> 8"	6"	2.5lb
<input type="checkbox"/> 10"	6"	6.5lb
<input type="checkbox"/> 12"	6"	8.0lb

Options	
<input type="checkbox"/>	24V Actuator
<input type="checkbox"/>	120 V Actuator
<input type="checkbox"/>	Bronze Bearings
<input type="checkbox"/>	Stainless steel frame
<input type="checkbox"/>	Custom length frame

Job name:
Location:
Engineer:
Contractor: